


## Design drawing



## Cirrus 80

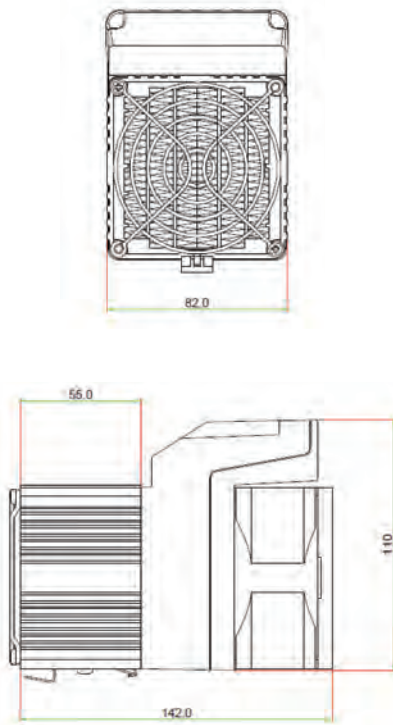

Cirrus 80			
Nominal Power*	at 10°C	300 / 600W	450 / 800W
Typical Max.In-Rush Current (A) RMS	at 230V AC	10	11
Typical Max.In-Rush Current (A) RMS	at 115V AC	15	14
Max. Body Temperature	(°C)	55	80
Electrical Protection Class		I	I
Ingress Protection		IP20	IP20
Operating Temperature Range	(°C)	-40 to +60	-40 to +60
Fan Volumetric Flow	(m3/h)	45 - 54	45 - 54
Fan Life Time - L10	at 40°C (hrs)	43.500	43.500
Nominal Input Voltage (Depending on Variant)	(V)	115/230AC	115/230AC
Dimensions	Cross Section (mm)	82 x 110	82 x 110
Length	(mm)	150	150
Weight	(g)	785	785
Finger Guards at Inlet and Outlet		Yes	Yes

\* Other power outputs available on request

**Ordering Example:**

Type	Power	Heater Voltage	DIN Clip**		Filter**	
			1 / 0	1 / 0	1 / 0	1 / 0
C80	600 W	230 V	1	1	1	1

**Order Code Example: C80 – 600W – 230 V – 1 – 1**

\*\* 1 = Yes, 0 = No